

适用范围：轻型、中型、重型便携式台钻或基钻连接电动工具。



特征：

1. 高精度螺纹和圆锥孔紧密地连接在工具上。
2. 外壳，锁孔，钥匙经过淬火。
3. 夹爪特殊处理，具有良好耐磨性。
4. 外壳齿轮和钥匙齿轮冷压成型。
5. 精度准确可靠，持久耐用。

Application: Recommended for Light, Medium and Heavy-Duty portable bench or floor mounted power tools.

Features:

1. High precision threaded and tapered tightly mounts on the tools.
2. Sleeve, key hole and key are shaped by quenching.
3. Jaws are specifically engineered for tight tolerance production drilling.
4. Sleeve teeth and key holes are shaped by cold pressing.
5. Super precision and durable.

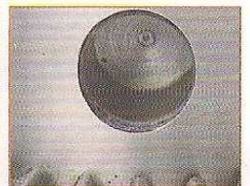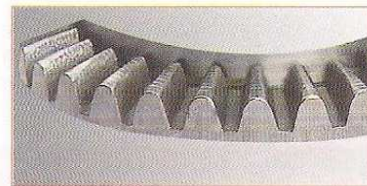

外壳冷挤压 cold pressing

锁孔热处理 heat-treated

MORSE TAPER MOUNT

工厂编号 Art.No	型号 Model	夹持范围 mm	Capacity Inch	连接尺寸 Mount	D mm	L1 mm	L mm	报价 Unit Price
342002	J2106H	0.6-6	1/64-1/4	B10	30.3	39.5	50	
343102	J2110H	1.0-10	1/32-3/8	B12	43.4	54	69.7	
344202	J2113H	1.0-13	1/32-1/2	B16	53.2	67	86	
345202	J2516M	3.0-16	1/8-5/8	B16	53.2	67	86	
345302	J2516M	3.0-16	1/8-5/8	B18	53.2	67	86	
346202	J2116H	1.0-16	1/32-5/8	B16	57	75	93	
346302	J2116H	1.0-16	1/32-5/8	B18	57	75	93	
348402	J2120H	5.0-20	3/16-3/4	B22	65.3	82	110	

JACQUARD TAPER MOUNT

工厂编号 Art.No	型号 Model	夹持范围 mm	Capacity Inch	连接尺寸 Mount	D mm	L1 mm	L mm	报价 Unit Price
382102	J2206H	0.6-6	1/64-1/4	JT1	30.3	39.5	50	
383202	J2210H	1.0-10	1/32-3/8	JT2	43.4	54	69.7	
384402	J2213H	1.0-13	1/32-1/2	JT33	53.2	67	86	
384702	J2213H	1.0-13	1/32-1/2	JT6	53.2	67	86	
385302	J2616M	3.0-16	1/8-5/8	JT3	53.2	67	86	
385402	J2616M	3.0-16	1/8-5/8	JT33	53.2	67	86	
385702	J2216M	3.0-16	1/8-5/8	JT6	53.2	67	86	
386302	J2216H	1.0-16	1/32-5/8	JT3	57	75	93	
387502	J2219H	1.0-19	1/32-3/4	JT4	65.3	82	110	
388302	J2220H	5.0-20	3/16-3/4	JT3	68	92	120	