



ORDER NO.	CODE NO.
VEC-300G	1024-010
VEC-500G	1024-011
VEC-600G	1024-012

### Features

- During operation, the grinding sander may be micro adjusted and repaired without changing its dimensions.
- The tightness of belt may be automatically adjusted and controlled (the larger the resistance, the tighter the belt.)
- The dimensions precision of cutting off the length of working piece are not subject to the effect of the difference of thickness of cutting-off sander piece.
- The rapid chuck is used to hold the working piece in place, opening or closing it is very quick, and Ø1-25mm is the same.
- When operation, a shaft with two tapered ends is used for transmission and characterized by high stability low wearing rate and long life.
- The rapid positioning rule is in the unit of 20mm and provided with a micro rule (0mm to 25mm) of which the zeroing point is the dimensions at the rapid positioning point.
- The minimum of cutting length is 60mm




For Clamping




For Cutting & Grinding

1.




2.



3.



4.

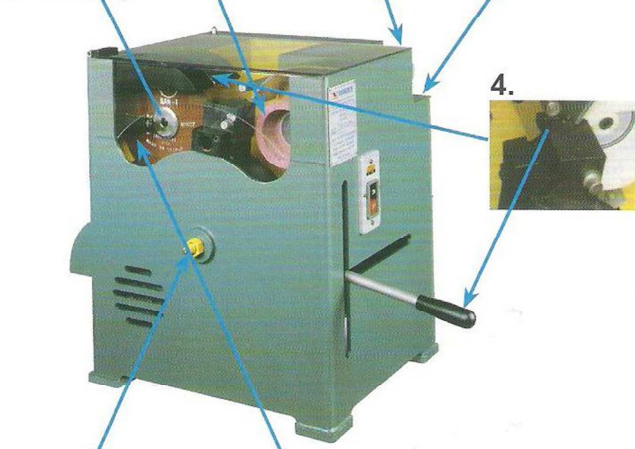

5.



6.



The measure rule

### SPECIFICATION

Cut-off precision	25m/mø x 300m/m ± 0.01
Right-angle precision	25m/mø x 90° ± 0.01
Cut-off sander lamina	1m/m t x 180m/mø (Hole) 31.8m/mø
Grinding sander	WA46K x100 x 50 x 20
R.P.M.	3600
Motor	3/4HP 110/220V 1 or 3 phase
Capacity	VEC-300G 300mm VEC-500G 500mm VEC-600G 600MM
Weight (Approx.)	105.5kgs (107kgs) (110kgs)
Machine Size	L430m/m x W360m/m x H500m/m

- The length of measure: 300mm is for VEC-300G  
500mm is for VEC-500G  
600mm is for VEC-600G  
Except the measure rule length is different, all items of body are same.

- Please notify the voltage & phase, when you ordering